


# ワイシャツプレス


TAY-102S [衿・カフス]




TAY-112V [衿肩・カフス]

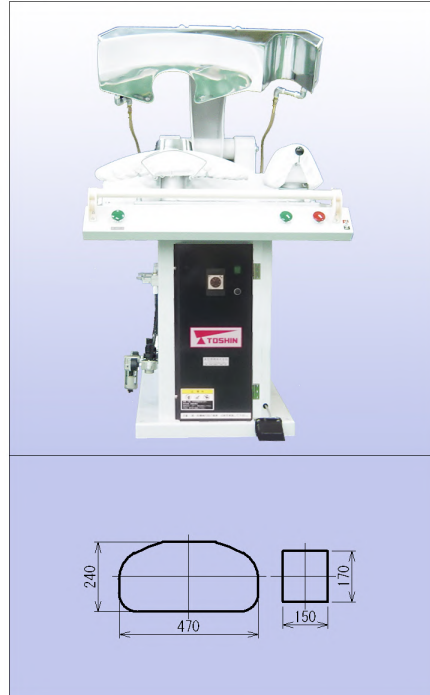


TAY-122V [タック]

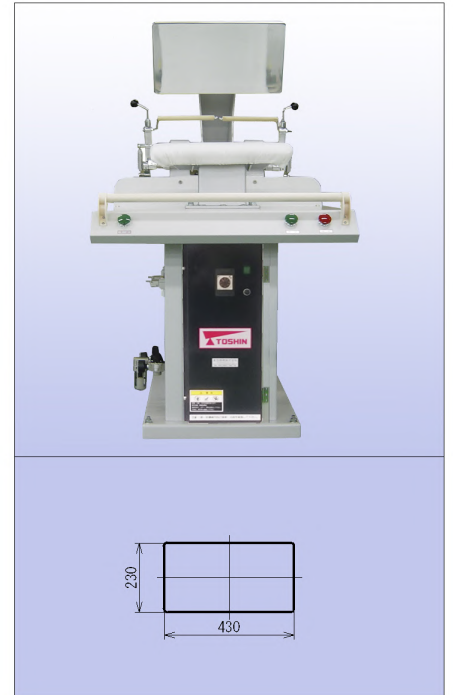

TAY-152V [タック・スリーブ]

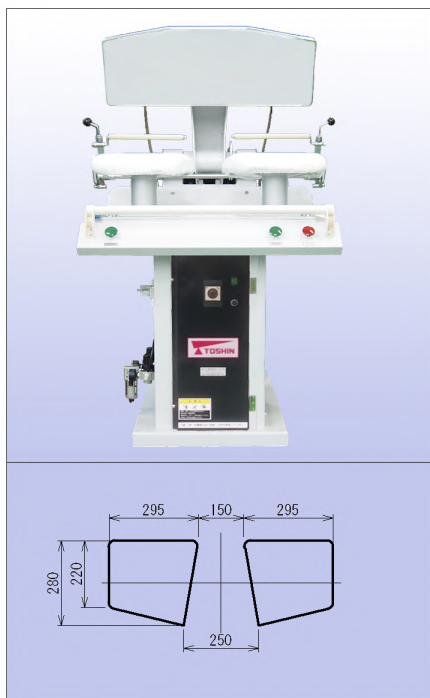

TAY-132V [廻胴]

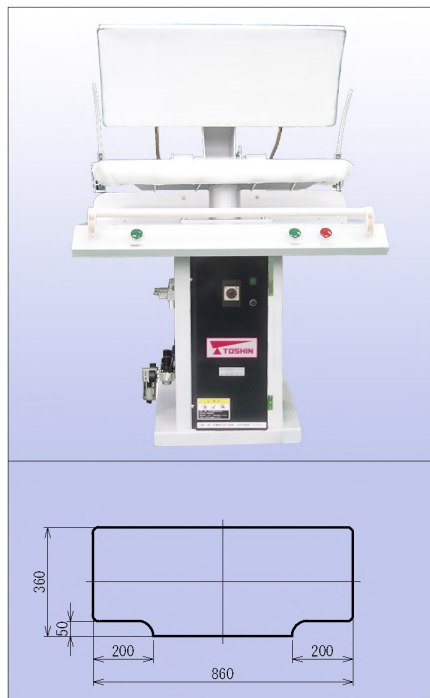

	エア			蒸気			コテ* 上/下	パワー モーター kw	電源 注文時、ご指定下さい。	機械寸法 巾×奥行×高
	供給空気圧 Mpa	空気消費量 l/c	エア配管 PT	供給蒸気圧 Mpa	蒸気消費量 kg/h	蒸気配管 PT				
TAY-102S	0.6	18.0	1/4	0.4-0.6	12.0	1/2	S/S	単相100V	三相200V	1,100×1,065×1,130
TAY-112V	0.6	13.8	1/4	0.4-0.6	10.0	1/2	S/V			800× 965×1,130
TAY-122V	0.6	13.5	1/4	0.4-0.6	9.0	1/2	S/V			800× 965×1,130
TAY-132V	0.6	13.5	1/4	0.4-0.6	13.0	1/2	S/V			1,000×1,065×1,130
TAY-152V	0.6	13.5	1/4	0.4-0.6	9.0	1/2	S/V			800× 965×1,130

\*コテの種類: S=スチーム V=バキューム



TOSHIN SEIKI CO.,LTD.